

Current Transformer Model 3P4

Window Diameter 1.56"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

APPLICATION:

3 phase metering and other switchboard applications.

FREQUENCY:

50-400 Hz.


INSULATION LEVEL:

600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Transformers can be ordered with secondary leads configured in various ways (consult factory).

Approximate weight 6.75 lbs.

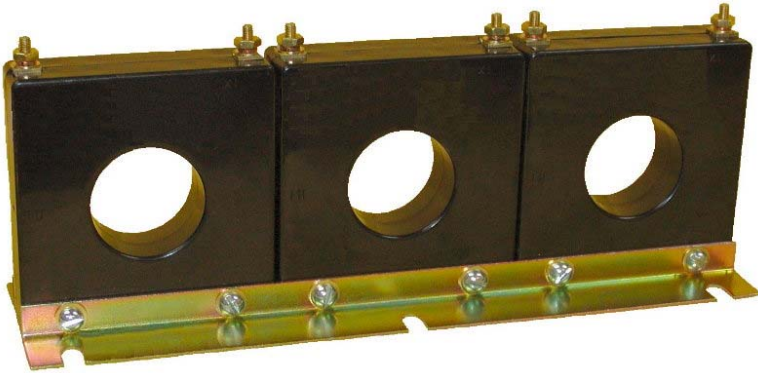

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)
		BO.1	BO.2	BO.5	BO.9	B1.8	
3P4-500	50:5	4.8	—	—	—	—	0.011
3P4-101	100:5	1.2	2.4	—	—	—	0.023
3P4-151	150:5	0.6	1.2	2.4	—	—	0.034
3P4-201	200:5	0.6	0.6	1.2	2.4	—	0.045
3P4-251	250:5	0.6	0.6	1.2	2.4	2.4	0.057
3P4-301	300:5	0.3	0.3	0.6	1.2	2.4	0.068
3P4-401	400:5	0.3	0.3	0.6	1.2	1.2	0.091
3P4-501	500:5	0.3	0.3	0.6	0.6	1.2	0.113
3P4-601	600:5	0.3	0.3	0.6	0.6	1.2	0.136
3P4-751	750:5	0.3	0.3	0.6	0.6	0.6	0.170
3P4-801	800:5	0.3	0.3	0.6	0.6	0.6	0.181
3P4-102	1000:5	0.3	0.3	0.3	0.6	0.6	0.226

Model 3P4

