

Current Transformer Model 115MR

Window Diameter 4.00"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Multi-Ratio

Models 112, 113 and 114 also available as Multi-Ratio.



APPLICATION:
Relaying.

FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.


The transformer winding is arranged so that the turns are fully distributed between all taps.

Order mounting bracket kit 0221B01525 separately.

Approximate weight 19 lbs.

Excitation data available upon request.

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
115-601MR	C50	2.0	1.5
115-122MR	C100	1.33	1.0
115-202MR	C200	1.0	0.8

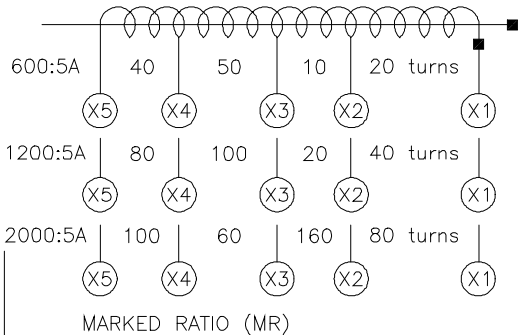

Model 115MR

