

Paladin Transducers

250 Series Class 0.5

An extensive range of transducers providing measurement, isolation and conversion of electrical parameters into industry standard DC output signals. The range offers protection against high voltage and overload, and resistance to vibration in harsh electrical environments. The transducer range also offers multiple analogue outputs in a single housing and individual measurement of most electrical parameters.

Advantages

- Convert high voltage signals to a low voltage DC output
- Limit voltage levels to the attached equipment and minimise the possibility of overloads or transients being passed on
- Provide a signal that can be transmitted from the measuring location to a remote point

Safety

Crompton transducers and transmitters are designed for use in harsh electrical environments and feature:

- High protection against overload - 20 x rated current for 1 second
- High degree of mechanical shock and vibration resistance
- Protection against high voltage
- Inputs, outputs and power supply are galvanically isolated (excluding resistance transmitters)

Ordering Information

When ordering please specify:

1. Product catalogue number
2. Current and/or voltage
3. Frequency
4. Auxiliary voltage AC or DC
5. For power products:
 - a. VT & CT ratios
 - b. System configuration i.e. single-phase, three-phase, three or four-wire, balanced or unbalanced load
 - c. required primary power level for DC full output
6. National specification indicated by 7th digit in the product number

253 Paladin Transducers, Class 0.5

The workhorse of the industry, thoroughly proven and installed in thousands of locations across the world. This range offers a very wide range of functions to complement the 256 Paladin range of power transducers. Functions include Voltage, current, frequency, tap position and resistance.

256 Paladin Transducers, Class 0.5

The industry standard power transducer, incredibly popular and available in a huge range of metering options. Power transducers are also available to special order with calibration at non standard frequencies. Alongside the Watt, VAr and VA transducers, the range also includes 3 in one current or voltage transducers and a DC to DC transducer.

250 Signal Isolator

Offers DC isolation of 0-20mA or 4-20mA signals.



Measured Parameters

- AC and DC current and voltage
- Active (Watts), reactive (VAr) and apparent (VA) power
- Frequency
- Power factor and phase angle
- Suppressed zero voltage for a narrow voltage range
- Tap position on a high voltage transformer
- Temperature transmitters for resistance thermometer detectors (RTD's)
- Resistance transmitters

Features

- Measurement of most electrical parameters
- Conversion to standard DC output signals
- Outputs suitable for indication, PLCs
- High accuracy
- Multiple outputs in single housing
- Exceptional waveforms handling
- Zero and span adjustments
- Single and three-phase systems
- Flame retardant cases
- Screw clamp terminals
- DIN-rail mounting

Benefits

- Cost savings remote metering
- Reduction of signal levels for ease of metering
- Isolated output for safety
- Protection against high voltage and overload

Applications

- Switchgear motor control centres, generating sets, energy management and building management systems

General Specifications

	Class 0.5 range	
Performance:	Designed to comply with BS6253 part 1, EN60688, IEC688, AS1384 and ANSI. C37	
Temperature range:	Storage -20°C to +70°C operating 0°C to +60°C calibrated at 23°C	
Temperature coefficient:	0.03%/per °C typical	
Humidity range:	Up to 95% RH	
Zero adjustment:	±2% minimum (except TAA & TVA)	
Span adjustment:	±10% minimum	
Accuracy class:	0.5 unless otherwise specified	
Accuracy range:	0 to 120% (except self powered)	
Stability:	+0.25% per annum typical (reducing with time)	
Response time:	<400 ms from 0 to 99% of rated output, 250ms to 90%	
DC outputs (varies by model bipolar for some models):	0/1mA into 0-10kΩ 0/5mA into 0-2kΩ 0/10mA into 0-1kΩ 0/20mA into 0-500Ω 4/20mA into 0-500Ω 0/5V 1k ohm minimum load 0/10V 1K ohm minimum load	
Current output protection:	Fully protected against open and short circuited output	
Voltage output protection:	Fully protected against open circuit output	
Maximum output:	24V DC when open circuit	
Output ripple:	<0.5% of full rated output	
Continuous overload capacity:	2 x rated current continuous 1.25 x rated voltage continuous	
Short duration overload capacity:	20 x rated current for 1 second 1.5 x rated voltage for 10 seconds	
Input burden:	AC <2 VA	
Auxiliary burden:	<2 VA AC <3.5 W DC auxiliary voltage variation	
Auxiliary permissible variation:	AC ±20%, DC ±15% including ripple, except wide range auxiliary A2: 12-48V DC, +25%, -15% (10.2V absolute minimum to 60V absolute maximum) A5: 100 to 250V AC ±15% 85V AC absolute minimum to 287V AC absolute maximum, 100V DC to 250V DC +25%, -15% (85V DC absolute minimum to 312V DC absolute maximum)	
Safety:	To IEC1010 with terminal cover, basic insulation category	
Flammability:	Flame retardant enclosure to UL90-V0 (terminal cover UL90-V2)	
Isolation:	Input/output/supply/case (except TRR, TRP, TRT and TRV with no input/output isolation)	
Interference:	In accordance with IEC 61326	
Input impedance: (DC I/P)	DC 1000 ohms/volt as standard 10k ohms/volt available on request	

DC/DC Transducers

DC/DC Transducers - Auxiliary Powered

A range of DC/DC transducers that provide an output directly proportional to the input. Suitable for data acquisition and data control monitoring. Input, output and auxiliaries are isolated.

Model	Accuracy	Function	Connection diagram
256-TTA	Class 0.5	DC current, 150mm(6") case	18
256-TTM	Class 0.5	DC millivolts, 150mm(6") case	18
256-TTV	Class 0.5	DC voltage, 150mm(6") case	18

Specifications


Input:	DC current: 200 μ A to 10A DC DC millivolts: 10mV to 2V DC DC voltage: 2V to 600V DC
Output:	0/1mA, 0/5mA, 0/10mA, 0/20mA or 4/20mA DC 1/0/1mA, 5/0/5mA, 10/0/10mA or 20/0/20mA DC 0/1V, 0/5V or 0/10V DC 1/0/1V, 5/0/5V or 10/0/10V DC
Current:	1 or 5A AC
Optional	100-480V AC
Auxiliary:	12V, 24V, 48V, 110V or 125V DC




Paladin Transducers 250 Series

Dimensions


Model 250

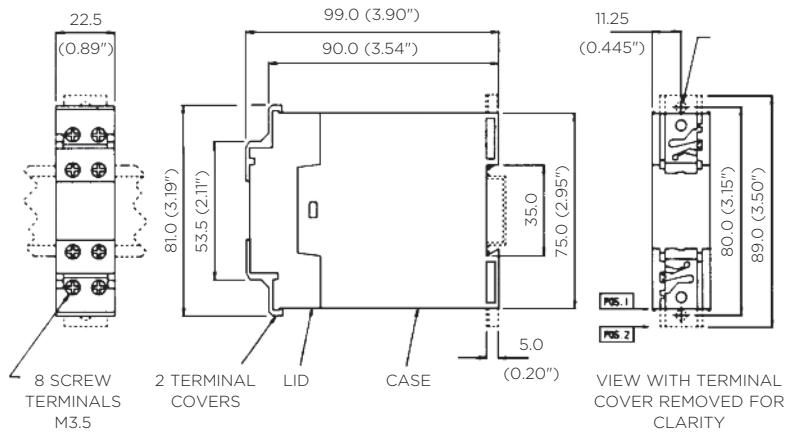

Model 252

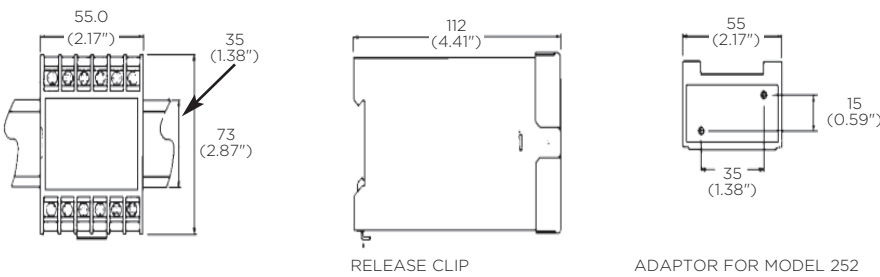

Model 253, 256
















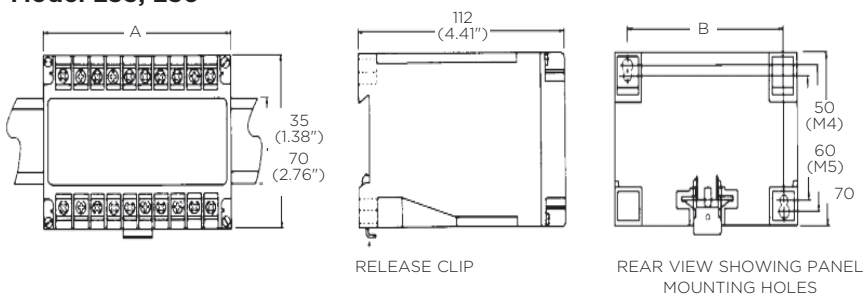


Model	A mm	A inches	B mm	B inches
250	22.5	0.88	-	-
252	55	2.17	-	-
253	75	2.96	60	2.36
256	150	5.90	135	5.31

The signal isolator is designed for use in signal transmission and processing applications to prevent noise and interference caused by ground loops between signal source and the measuring device. The isolator provides galvanic high voltage isolation between the source and measuring device.

Type 253-TRR

Temperature Transmitter – Diagram 17

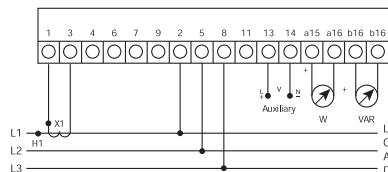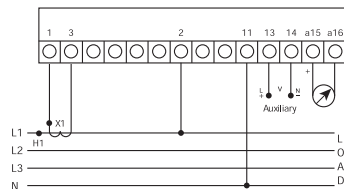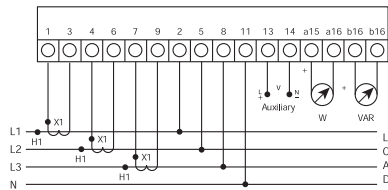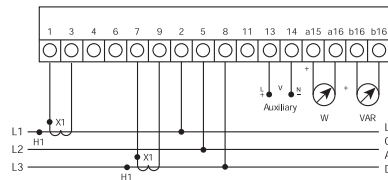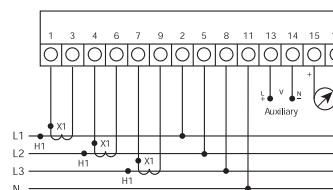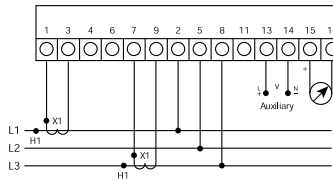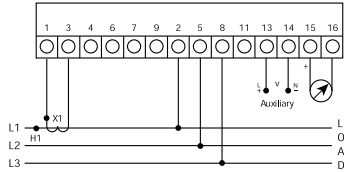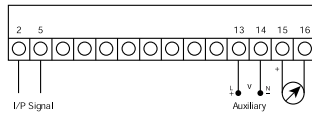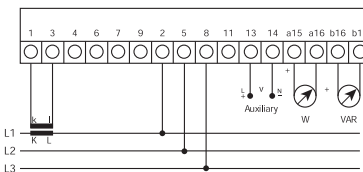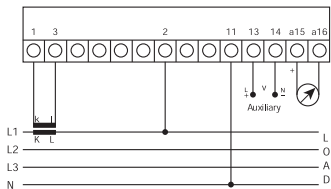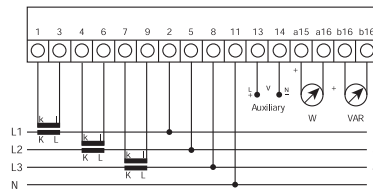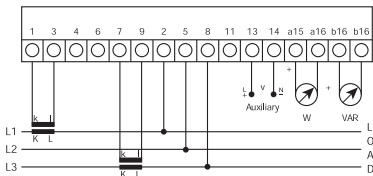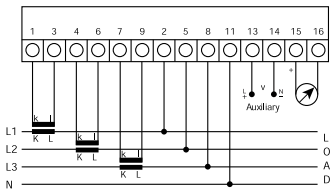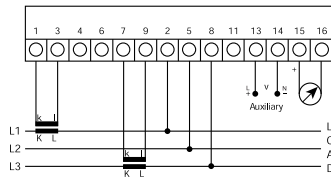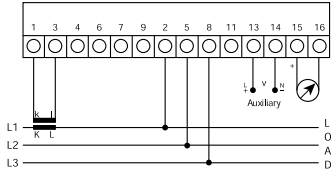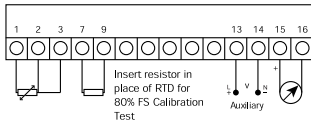

Type 256-TTA/M/V/F/C/N

DC/DC Transducer and Temperature Diagram 18

Type 256-XWL/XXL/XYL/XFW/XPW/XPG/XFG

Type 256-TWL/TPB/TFB/TFE
3 Ø 3W Balanced Load, Watts or VArS or VA or Phase Angle or Power Factor. One Output – Diagram 19

Type 256-XWM/XXM/XYM/XZM/XFU/XFC/XPU/XPC

Type 256-TWM/TXM/TYM
3 Ø 3W Unbalanced Load, Watts or VArS or VA or Phase Angle or Power Factor. One Output – Diagram 20

Type 256-XWW/XXW/XYW/XZW/XFT/XFB/XPT/XPB

3 Ø 4W Unbalanced Load, 3 Elements, Watts or VArS or VA or Phase Angle or Power Factor. One Output – Diagram 21

Type 256-XDM

3 Ø 3W Unbalanced Load, Watt and VAr, 2 Outputs – Diagram 22

Type 256-XDW

3 Ø 4W Unbalanced Load, 3 Elements, Watt and VAr, 2 Outputs – Diagram 23

Type 256-XWH/XXH/XYH/XFV/XFD/XPV/XPD

Type 256-TWH/TXH/TYH
3 Ø 4W Balanced Load, Watt, VAr and VA or Phase Angle or Power Factor. 1 Output – Diagram 24

Type 256-XDL

3 Ø 3W Balanced Load, Watt and VAr, 2 Outputs – Diagram 25