

# Current Transformer Model 786MR

Window Diameter 6.50"

## Multi-Ratio



### REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1

#### APPLICATION:

Relaying and metering.

#### FREQUENCY:

50-400 Hz.

#### INSULATION LEVEL:


0.6 kV, BIL 10 kV full wave.

Secondary terminals are brass screws No. 10-32 with one flatwasher, lockwasher, accessible from either side.

Approximate weight 58 lbs.

Excitation data available upon request.

CATALOG NUMBER	RELAY CLASS	ANSI METERING CLASS AT 60HZ	CONTINUOUS THERMAL RATING FACTOR	
			@30°C	@55°C
786-601MR	C200	0.3B0.9	2.0	1.5
786-122MR	C400	0.3B1.8	2.0	1.5
786-202MR	C400	0.3B1.8	2.0	1.5
786-302MR	C400	0.3B1.8	1.33	1.0
786-402MR	C400	0.3B1.8	1.33	1.0

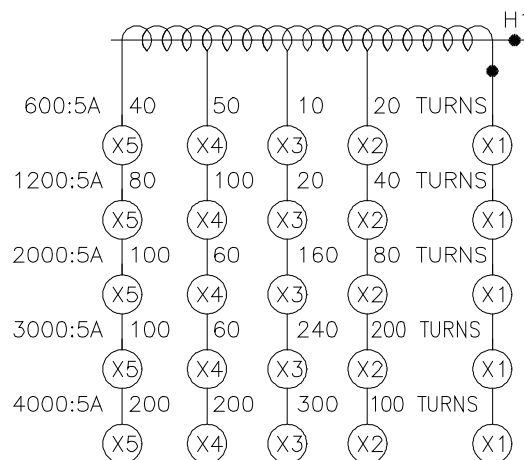

CONNECTION DIAGRAM

Model 786MR

