

# Current Transformer Model 203MR

Window Diameter 5.25"


REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1

## Multi-Ratio

Models 200, 201, 202 and 204 also available as 600:5 Multi-Ratio.

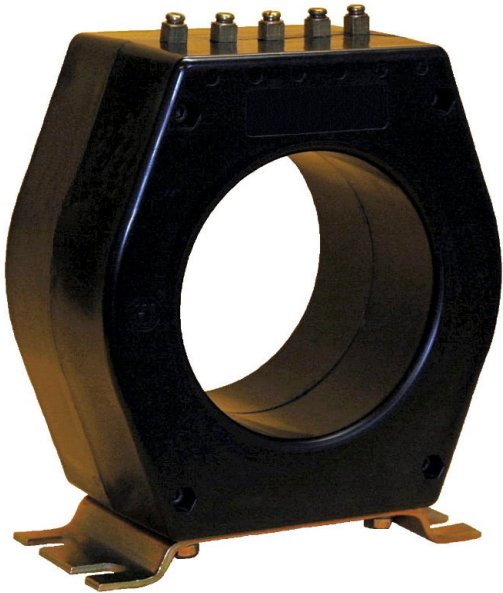

**APPLICATION:**

Relaying.

**FREQUENCY:**

50-400 Hz.

**INSULATION LEVEL:**


600 Volts, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.


The transformer winding is arranged so that the turns are fully distributed between all taps.

Approximate weight 28 lbs.


| CATALOG<br>NUMBER | RELAY<br>CLASS | CONTINUOUS<br>THERMAL<br>RATING FACTOR |        |
|-------------------|----------------|--|--------|
|                   |                | @ 30°C                                 | @ 55°C |
| 203-601MR         | C100           | 2.0                                    | 2.0    |
| 203-122MR         | C200           | 2.0                                    | 1.5    |
| 203-202MR         | C200           | 1.0                                    | 0.8    |
| 203-302MR         | C200           | 1.0                                    | 0.6    |
| 203-402MR         | C100           | 1.0                                    | 0.6    |
| 203-502MR         | C100           | 0.8                                    | 0.3    |

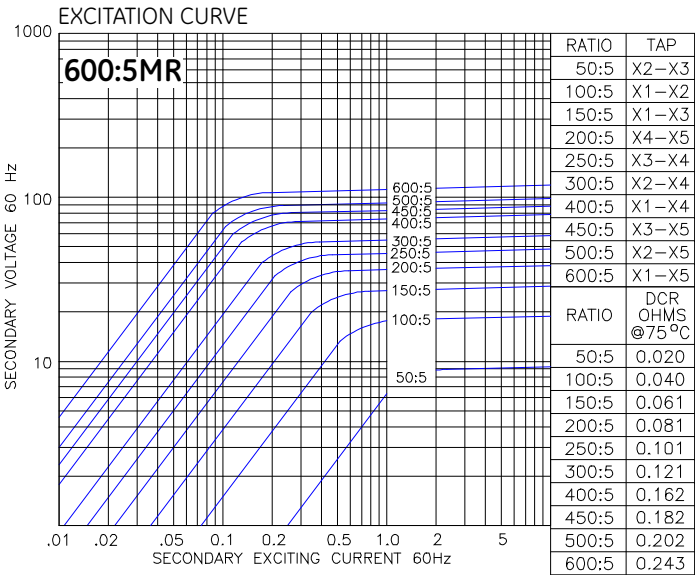


Model 203-601MR

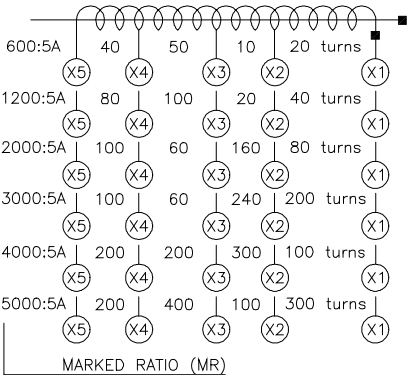


# Model 203MR

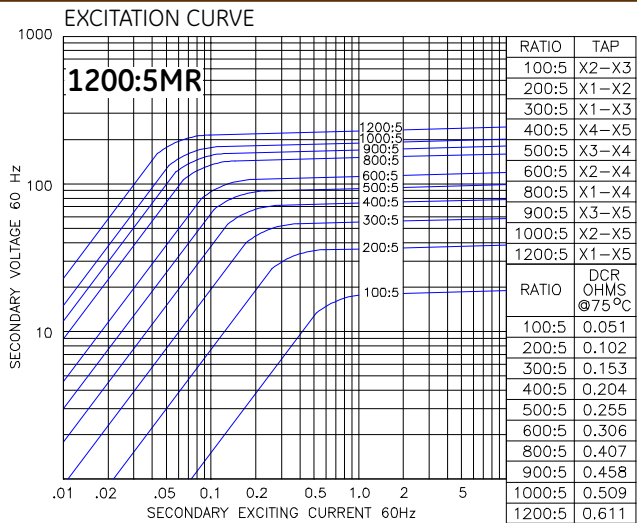


Model 203-122MR

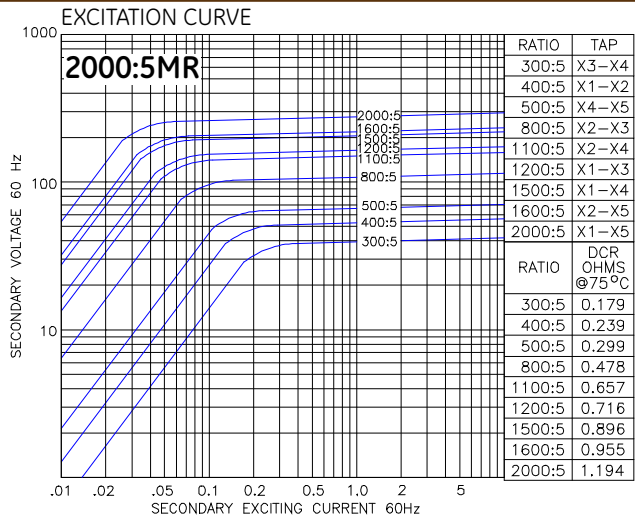


Model 203-202MR

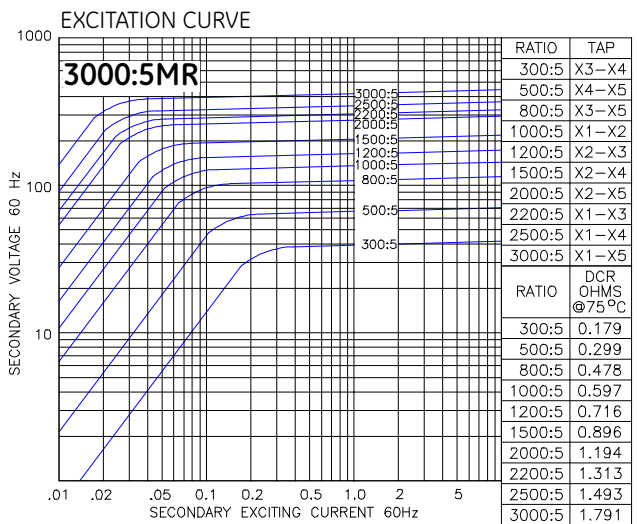

Model 203-302MR

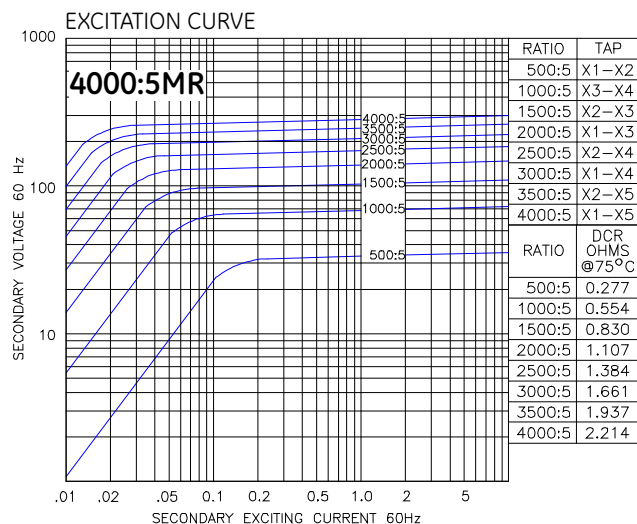

Model 203-402MR

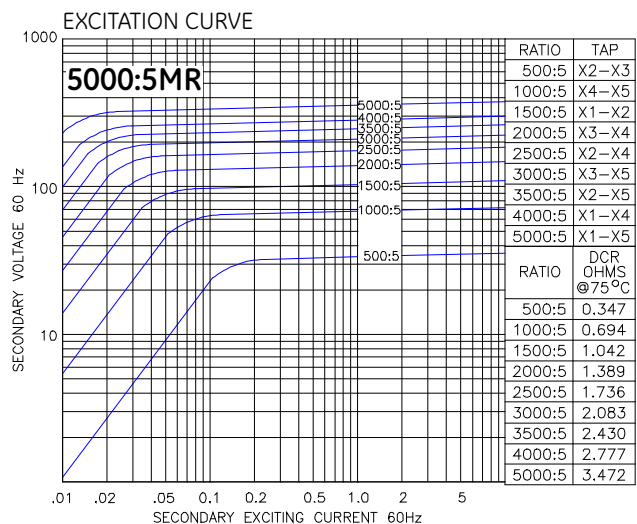

Model 203-502MR

