

Current Transformer Model 388MR

Window Diameter 5.75"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Multi-Ratio



APPLICATION:
Relaying.



FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts, 10 kV BIL full wave.


Terminals are brass screws No.10-32 with one flatwasher and lockwasher.

Approximate weight 35 lbs.


CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
388-601MR	C100	2.0	2.0
388-122MR	C200	2.0	1.5
388-202MR	C200	1.5	1.33
388-302MR	C400	1.5	1.0
388-402MR	C400	1.33	1.0

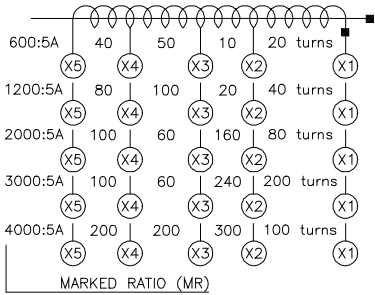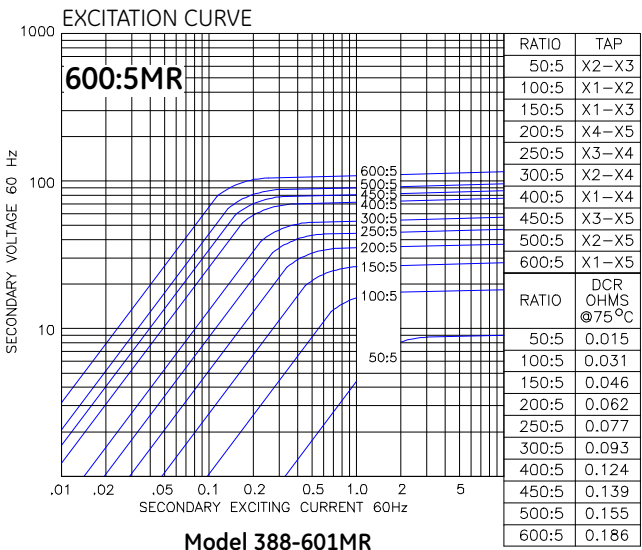


Model 388MR

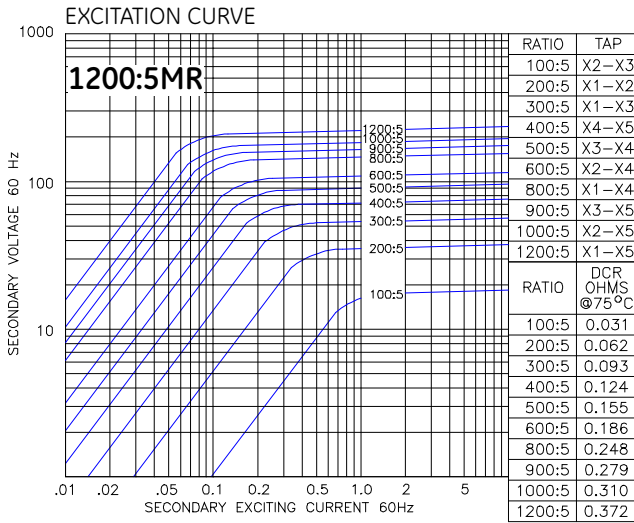


Model 388-122MR

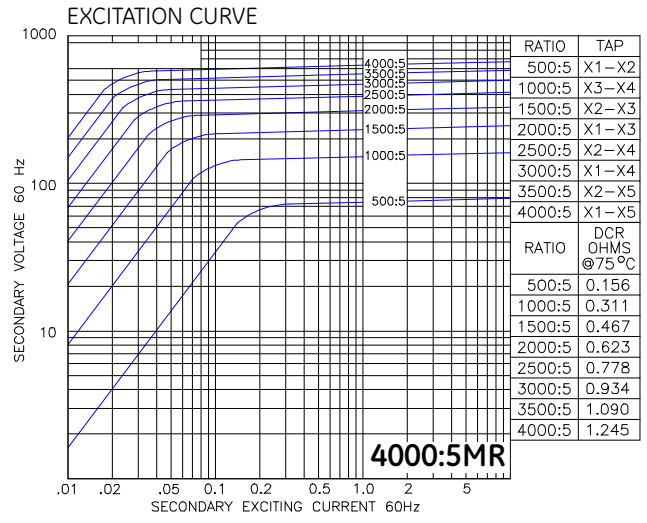

Model 388-402MR

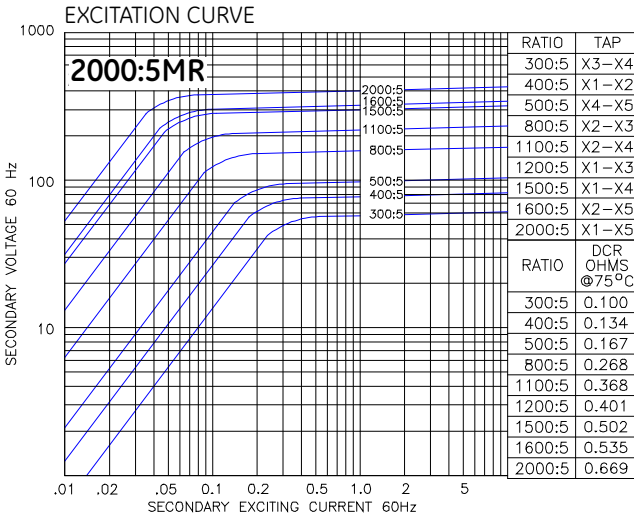

Model 388-202MR

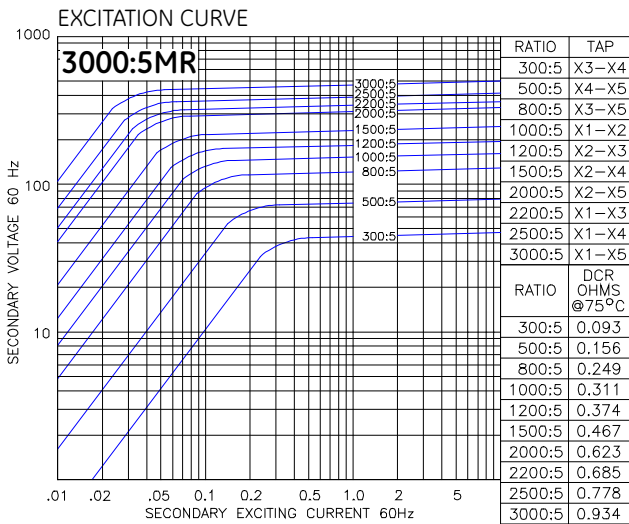

Model 388-302MR

