

Current Transformer Model 389MR

Window Diameter 5.75"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Multi-Ratio



APPLICATION:
Relaying.


FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts, 10 kV BIL full wave.


Terminals are brass screws No.10-32 with one flatwasher and lockwasher.

Approximate weight 70 lbs.

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30 °C	@ 55 °C
389-601MR	C200	2.0	2.0
389-122MR	C400	2.0	1.5
389-202MR	C400	1.5	1.33

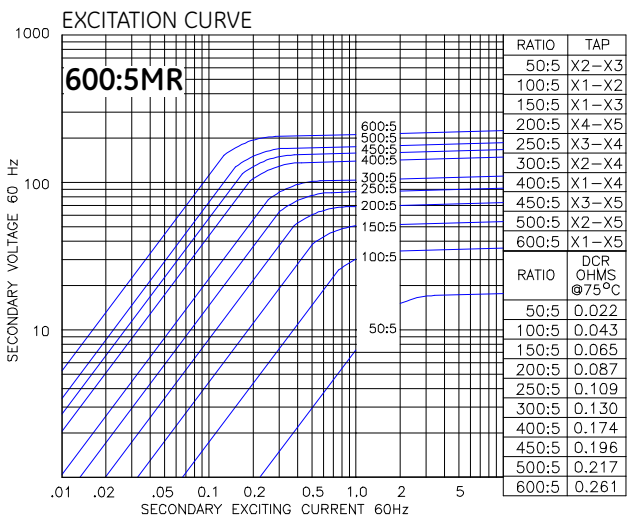


Model 389-601MR

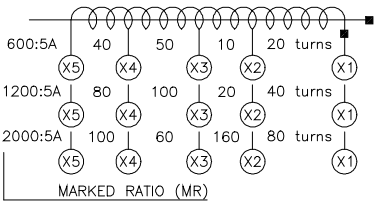


Model 389MR

EXCITATION CURVE

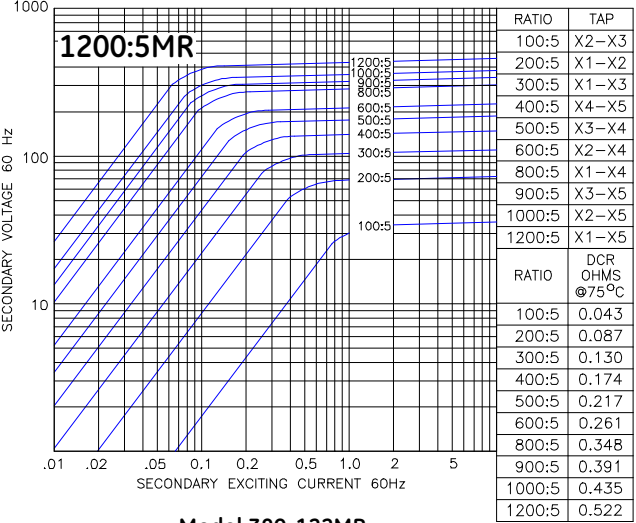

Model 389-122MR

EXCITATION CURVE

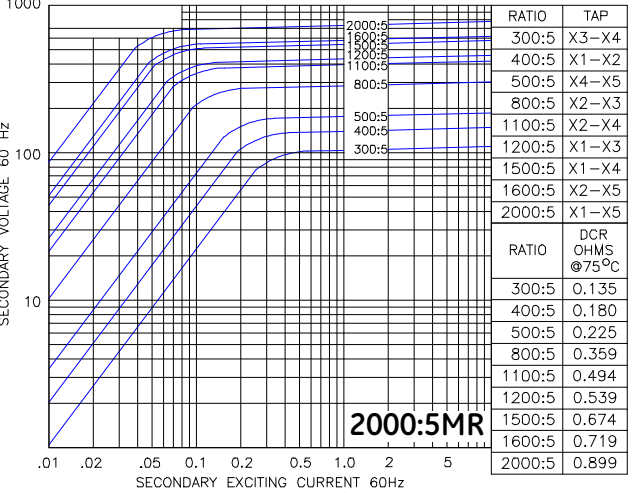

Model 389-202MR

