

# Current Transformer Model 3P5

Window Diameter 1.56"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1

**APPLICATION:**

3 phase metering and other switchboard applications.

**FREQUENCY:**

50-400 Hz.


**INSULATION LEVEL:**

600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Transformers can be ordered with secondary leads configured in various ways (consult factory).

Approximate weight 3.0 lbs.

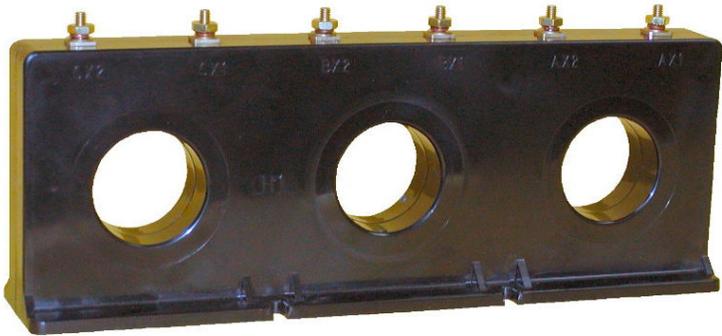

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)
		BO.1	BO.2	BO.5	BO.9	B1.8	
3P5-500	50:5	4.8	—	—	—	—	0.009
3P5-750	75:5	2.4	4.8	—	—	—	0.010
3P5-101	100:5	1.2	2.4	—	—	—	0.012
3P5-151	150:5	0.6	1.2	2.4	4.8	—	0.019
3P5-201	200:5	0.6	0.6	1.2	2.4	4.8	0.024
3P5-251	250:5	0.3	0.3	1.2	2.4	2.4	0.033
3P5-301	300:5	0.3	0.3	0.6	1.2	2.4	0.040
3P5-401	400:5	0.3	0.3	0.6	1.2	1.2	0.091
3P5-501	500:5	0.3	0.3	0.6	0.6	1.2	0.105
3P5-601	600:5	0.3	0.3	0.6	0.6	1.2	0.158
3P5-751	750:5	0.3	0.3	0.6	0.6	0.6	0.147
3P5-801	800:5	0.3	0.3	0.6	0.6	0.6	0.156
3P5-102	1000:5	0.3	0.3	0.3	0.3	0.6	0.196
3P5-122	1200:5	0.3	0.3	0.3	0.3	0.6	0.291

# Model 3P5

