

# Current Transformer Model 142MR

Window Diameter 7.25"

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1

## Multi-Ratio



### APPLICATION:

Relaying.

### FREQUENCY:

50-400 Hz.

### INSULATION LEVEL:


600 Volts, 10 kV BIL full wave.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.


Order mounting bracket kit 0221B00259 separately.

Approximate weight 31 lbs.

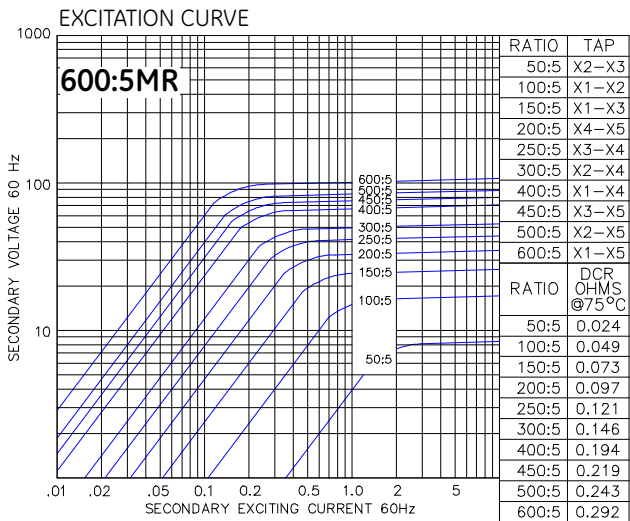


Model 142-601MR


CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
142-601MR	C50	2.0	2.0
142-122MR	C200	1.5	1.0
142-202MR	C200	2.0	1.5
142-302MR	C200	1.0	0.8
142-402MR	C200	1.0	0.8
142-502MR	C200	1.0	0.8

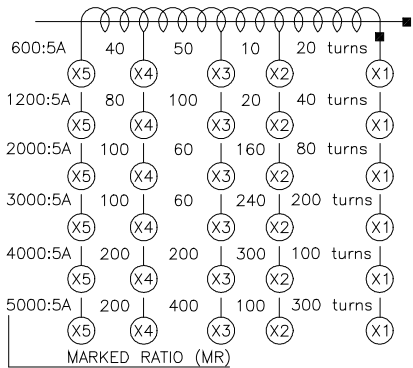


# Model 142MR

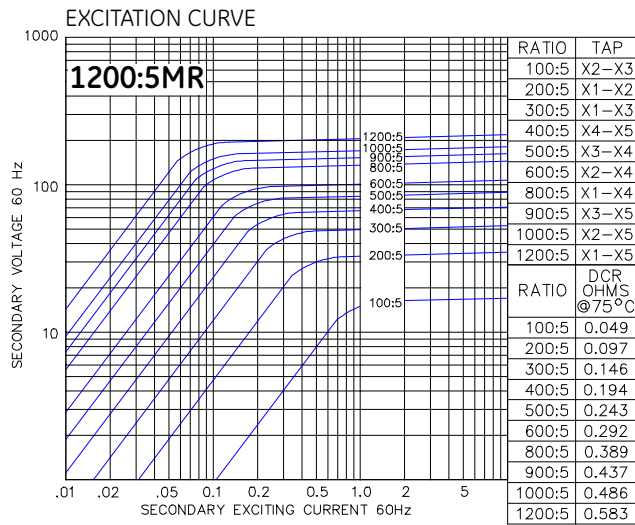


**Model 142-122MR**

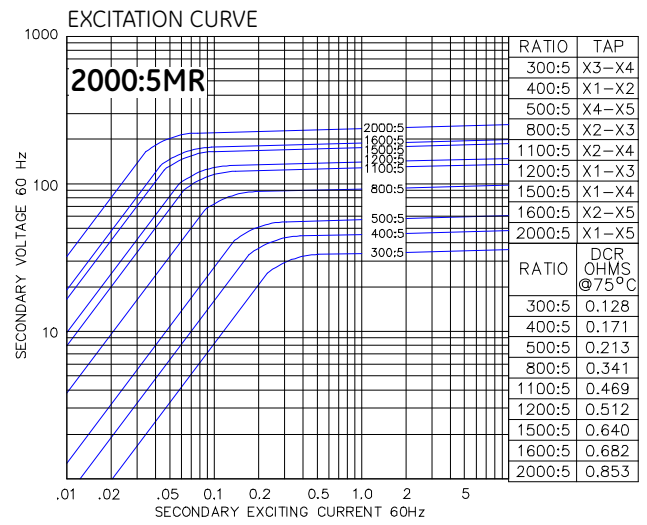


**Model 142-202MR**

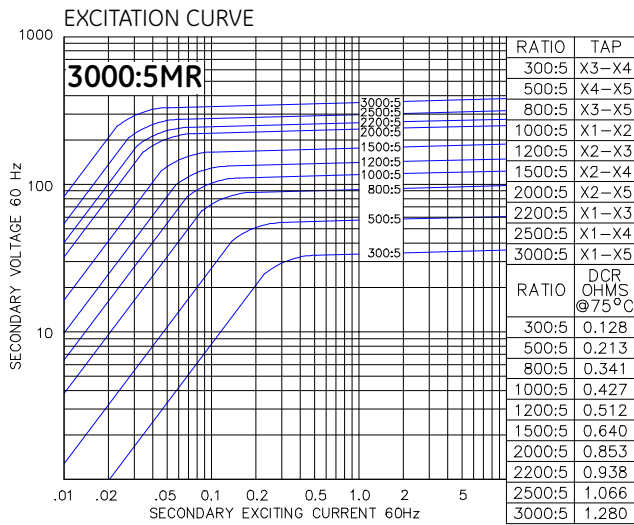

**Model 142-302MR**

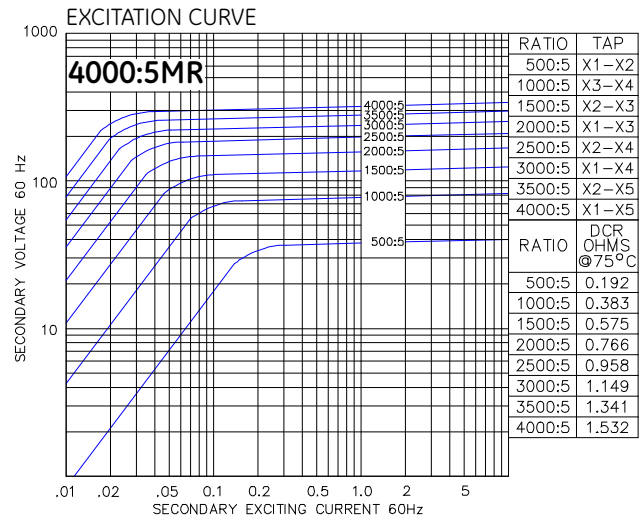

**Model 142-402MR**

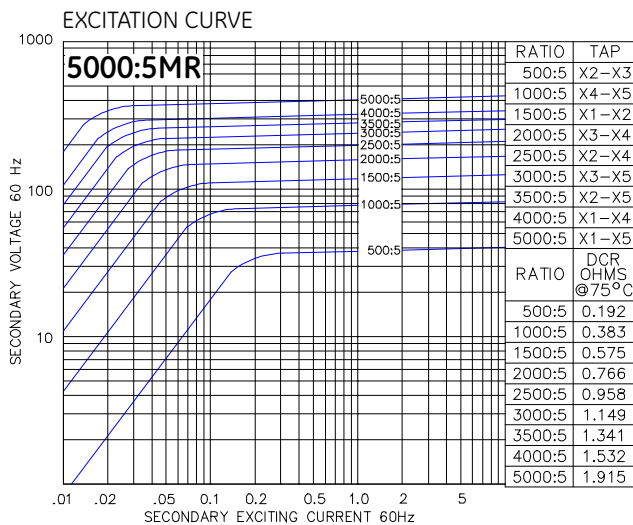

**Model 142-502MR**

