


**Current Transformer
Model 568TL, 568TS**
Window Size 7.45" x 3.75"



TL Style

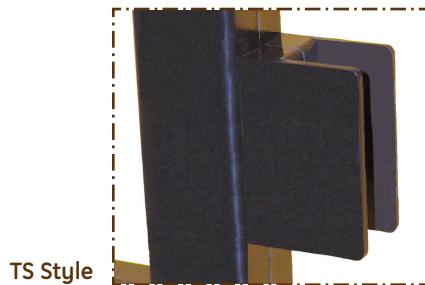

TS Style

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

APPLICATION:

Metering.

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts, 10 kV BIL full wave.

CONTINUOUS THERMAL

CURRENT RATING FACTOR:

1.33 at 30°C. amb., 1.0 at 55°C. amb.

TL-Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.

TS-Terminals are brass screws No. 10-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 4 lbs.

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)
		B0.1	B0.2	B0.5	B0.9	B1.8	
568**401	400:5	1.2	1.2	2.4	—	—	0.078
568**501	500:5	0.6	1.2	2.4	—	—	0.098
568**601	600:5	0.6	0.6	1.2	2.4	2.4	0.117
568**751	750:5	0.6	0.6	1.2	1.2	2.4	0.147
568**801	800:5	0.6	0.6	1.2	1.2	2.4	0.157
568**102	1000:5	0.3	0.3	0.6	1.2	1.2	0.196
568**122	1200:5	0.3	0.3	0.6	0.6	1.2	0.235
568**152	1500:5	0.3	0.3	0.3	0.6	0.6	0.294
568**162	1600:5	0.3	0.3	0.3	0.6	0.6	0.313
568**202	2000:5	0.3	0.3	0.3	0.6	0.6	0.417
568**252	2500:5	0.3	0.3	0.3	0.3	0.6	0.419
568**302	3000:5	0.3	0.3	0.3	0.3	0.6	0.625
568**322	3200:5	0.3	0.3	0.3	0.3	0.6	0.536
568**402	4000:5	0.3	0.3	0.3	0.3	0.6	0.834
568**502	5000:5	0.3	0.3	0.3	0.3	0.6	0.872

**Note: When ordering, prefix Cat No. with model designation required i.e. 568TL-201, or 568TS-201, etc.

Model 568TL, 568TS

