

MODEL 12 & 13

Current Transformer

Window Diameter 0.37" & 0.56"



Model 12

Model 13



Application

For current to voltage conversion by use of a loading resistor.

These two lightweight, miniature current transformer are suitable for direct mounting on printed circuit boards. Model 13 is provided with standard hexagon nuts, to secure the transformer to a printed circuit board so that the assembly can withstand vibration and shock.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

Models 12:
100 A @ 30°C amb.,
80 A at 55°C amb.

Models 13:
200 A at 30°C amb.,
120 A at 55°C amb

Approximate weight 0.1 - 0.2 lbs

Data Table: Models 12 & 13


CATALOG NUMBER	TURNS
12-500T	500
12-1000T	1,000
12-1050T	1,050
13-200T	200
13-400T	400
13-1000T	1,000
13-2000T	2,000
13-3000T	3,000




461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com

Model 12 & Model 13

Model 12

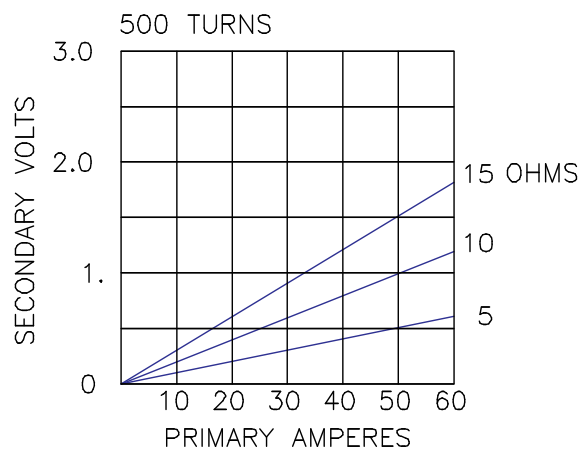

Model 13

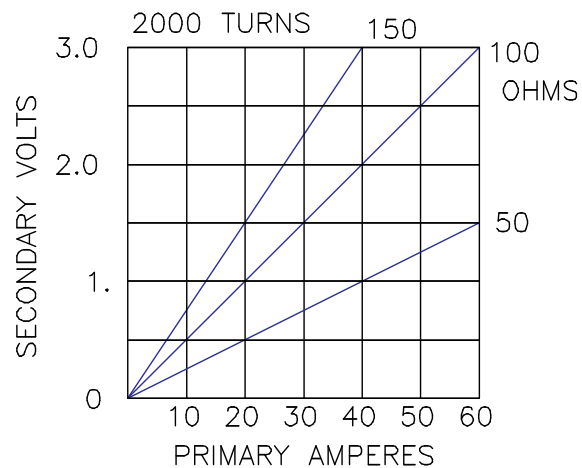

The graphs above illustrate the voltage output capacity of each for $\pm 3\%$ linearity.

