


MODEL 3P10

Current Transformer

Window Size 1.58" x 0.26"

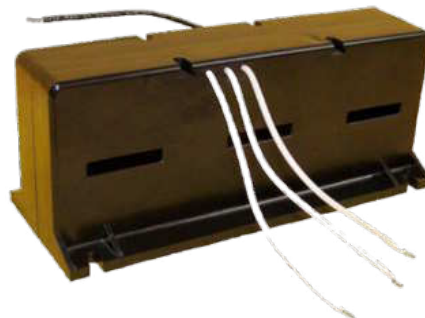

REGULATORY AGENCY APPROVALS



E93779

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Application

3 phase relaying and motor overload protection

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor:

1.0 at 30°C ambient.

0.75 at 55°C ambient.

Secondary leads are UL 1015, 105°C.,
CSA approved, No. 16 AWG, 24" long.

Approximate weight 4 lbs.

Data Table Model 3P10

CATALOG NUMBER	CURRENT RATIO	VA FOR $\pm 1\%$ CLASS	SECONDARY WINDING RESISTANCE (Ω @ 75 °C)
3P10-201	200:5	7.5	0.056
3P10-251	250:5	10.0	0.071
3P10-301	300:5	12.5	0.089
3P10-401	400:5	15.0	0.113
3P10-501	500:5	20.0	0.186
3P10-601	600:5	25.0	0.223

Note: Captive slots on top of transformer case can be used for attaching auxiliary device mounting plate, (not supplied).
Originally designed for use with molded case circuit breakers and motor starters with 3.12" bus center lines.
Can be mounted directly on bus bar and held in place with roll pins inserted in bus.



461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com

Model 3P10

