

MODEL 3PT3-60

Indoor Voltage Transformer

Medium Voltage

Accuracy Class

0.3 WX, 0.6 M, 1.2 Y at 100 % rated voltage with 120 V based ANSI burden.

Frequency

60 Hz

Thermal Rating

700 VA total, 350 VA per phase, at 30 °C. amb.

450 VA total, 225 VA per phase, at 55 °C. amb

Model 3PT3-60

GROUP	CATALOG NUMBER FUSES	CATALOG NUMBER FUSES CLIPS ONLY	RATED PRIMARY VOLTAGE	RATIO	SUGGESTED FUSE RATING**
1	3PT3-60-242FFF	3PT3-60-242CCC	2,400	20:1	1.0E
2	*3PT3-60-332FFF	*3PT3-60-332CCC	3,300	30:1	1.0E
2	3PT3-60-422FFF	3PT3-60-422CCC	4,200	35:1	0.5E
2	3PT3-60-482FFF	3PT3-60-482CCC	4,800	40:1	0.5E

* Rated 50/60 Hz, 03 W, 500 VA Total @ 30°C, 350 VA Total @ 55°C.



REGULATORY AGENCY APPROVALS



E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Standard Secondary Voltage

120 volts.

Maximum System Voltage

5.6 kV, BIL 60 kV.

Primary terminals are No. 10-32
brass screws with one flatwasher
and lockwasher.

Approximate weight 38 lbs.




461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com

Model 3PT3-60




Connection Diagram

** See page 32, Primary Fuse Rating
Fuse is 0.81" Diameter, 5.62" Long.

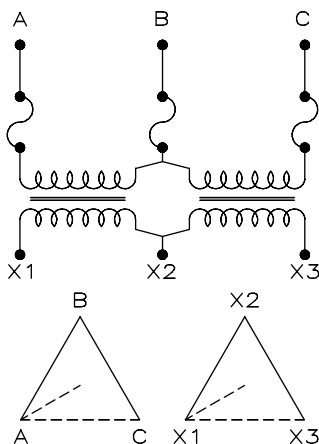


RECOMMENDED MINIMUM SPACING
A = Case to Ground = 1.50" Minimum.

Recommended spacing are for guidance only.
User needs to set appropriate values to assure
performance for high potential test, impulse
test, high humidity, partial discharge, high
altitude, and other considerations like
configuration.

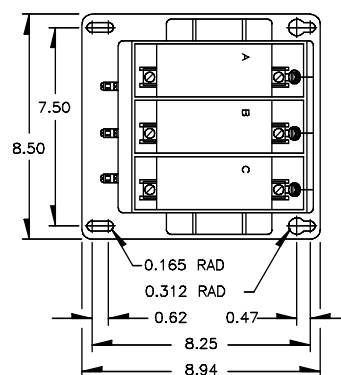

SINGLE HOLE SOLDERLESS
LUGS FOR #6 THRU #14 WIRE



* The core and coil assembly is encased in a
plastic enclosure and vacuum encapsulated in
polyurethane resin.



461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com