

MODEL 790MR

Current Transformer with Multi-Ratio

Window Diameter 5.00"



REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

0.6 kV, 10 kV BIL full wave.


Model 790MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL CURRENT RATING FACTOR @ 30° C
790-122MR	C100	1.5
790-202MR	C100	1.5

Continuous Thermal Current Rating Factor

Secondary terminals are brass screws No. 10-32 with one flatwasher, lockwasher.

Approximate weight 15 lbs.

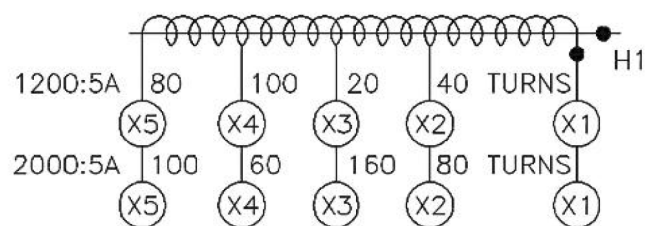


CONNECTION DIAGRAM




461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com

Model 790MR

Model 790-202MR

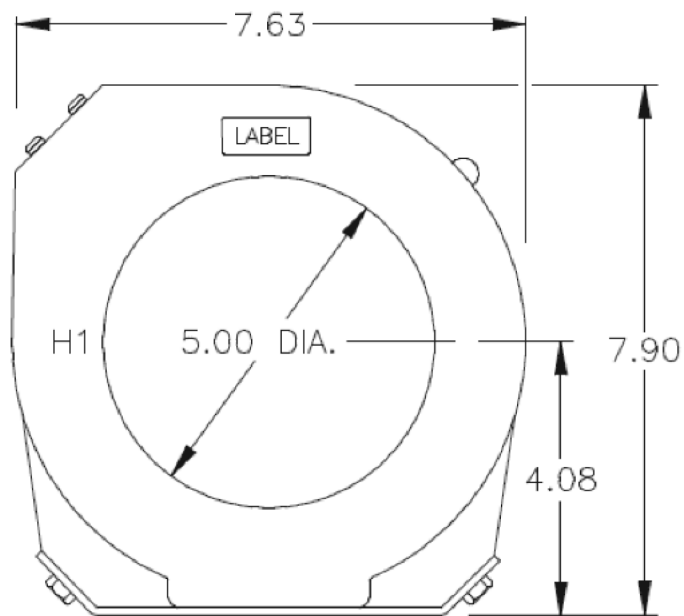

BASEPLATE HAS
(4) 0.47 SQUARE HOLES
FOR CAPTIVE NUTS

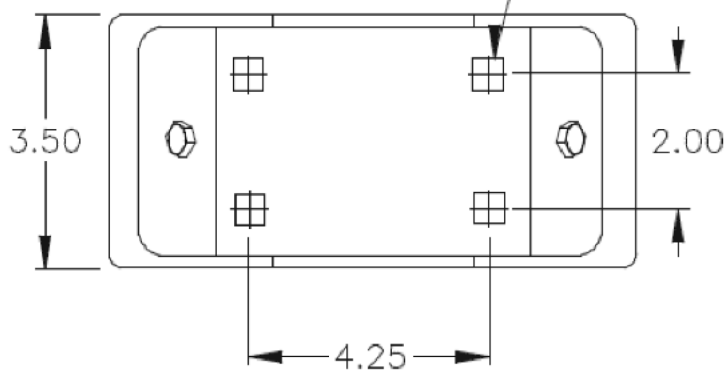

(BOTTOM VIEW)