

MODEL HGF5C

Ground Fault Current Transformer



Specially designed to match the ground fault input of Multilin motor protection relays and should be used to ensure correct performance. This CT can sense low leakage currents over the relay setting range with minimum error.



Notes

1. Ratio 50:0.025 Amp
2. Insulation Class: 0.6 kV, 10 kV BIL
3. Frequency: 50-60 Hz
4. DC Resistance approximately 26 ohms
5. Thermoplastic case on metal bracket
6. Terminals are #10-32 brass studs with one flat washer, lockwasher, and regular nut

7. Approximate weight: 3.0 lbs. (1.4 kg)
8. UL and cUL recognized
9. Dimensions shown as inches [mm]
10. Order mounting bracket kit 0221B00231 separately
11. Application: Ground fault sensors to work in conjunction with Multilin motor management relays.

Part Number

125-SD-38591
50:0.025 Amps (2,000:1 Ratio)
Replaces Multilin P/N HGF5

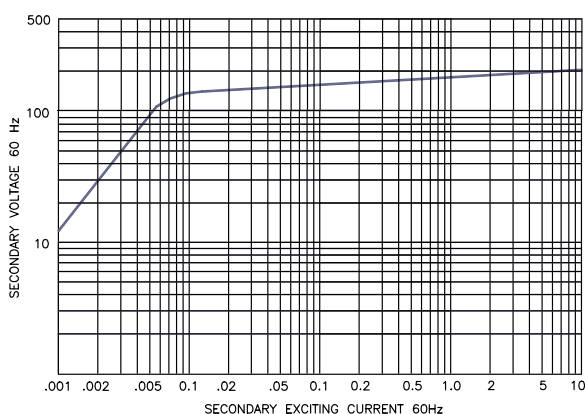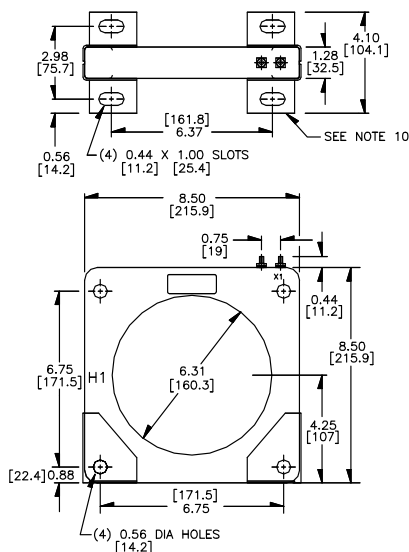

461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com