

MODEL 137MR

Current Transformer with Multi-Ratio

Window Diameter 5.50"



Application

Relaying.

Frequency



50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.







Model 137 MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
137-601MR	C200	2.0	2.0
137-122MR	C400	2.0	1.5
137-202MR	C400	1.5	1.0
137-302MR	C400	1.33	1.0
137-402MR	C400	1.0	0.8
137-502MR	C400	0.6	0.3

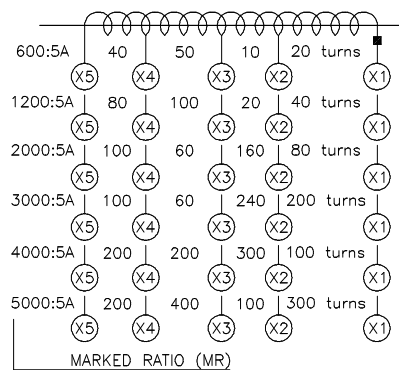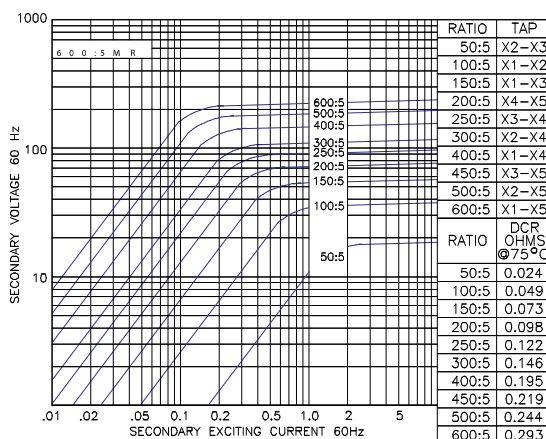

461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com

137MR

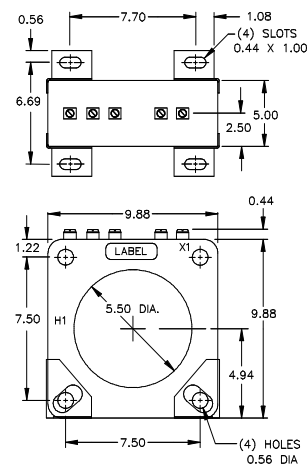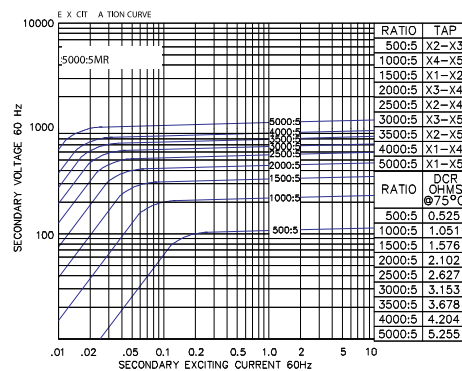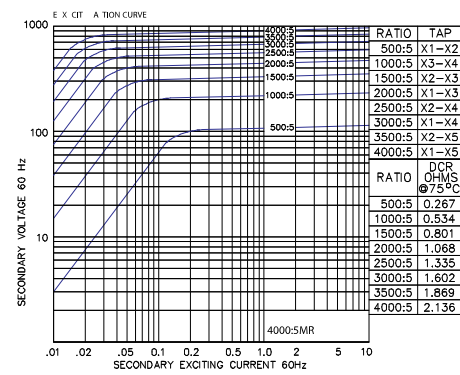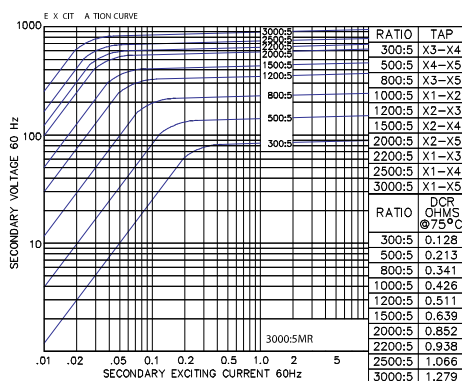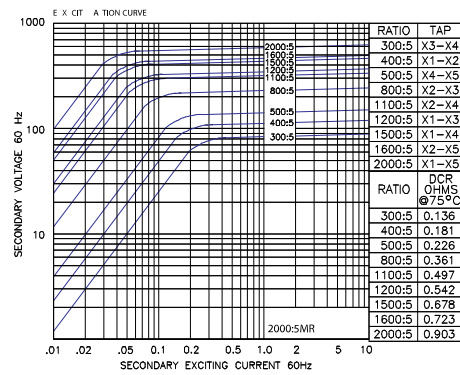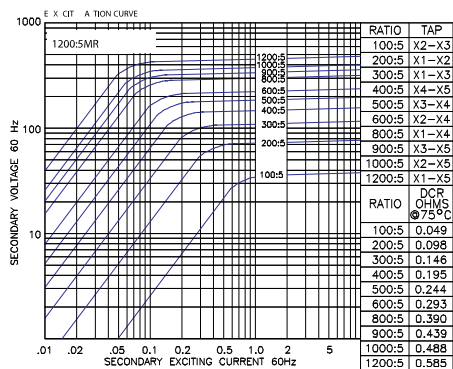

461 Boston Street, Unit E6, Topsfield, MA 01983
Toll Free (800) 644-9773 · Phone (978) 887-2020
meters@spectrumind.com