

# MODEL 76

## Current Transformer

Window Diameter 3.00"



Models 76RBT and 76RL Shown



### Application

With ammeters, wattmeters, and cross current compensation.

### Frequency

50-400 Hz

### Insulation Level

600 Volt, 10 kV BIL full wave.

Flexible leads are UL 1015, 105°C, CSA approved, #16 AWG, 24" long.

Non-standard, lead length can be specified.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

SFT case styles also available as SFL with leads.

Approximate weight 1.5 lbs.

### Data Table: Model 76

| CATALOG NUMBER | CURRENT RATIO | ACCURACY AT 60 Hz | BURDEN VA AT 60 Hz |
|----------------|---------------|-------------------|--------------------|
| 76**-201       | 200:5         | ±1%               | 5.0                |
| 76**-251       | 250:5         | ±1%               | 5.0                |
| 76**-301       | 300:5         | ±1%               | 6.0                |
| 76**-401       | 400:5         | ±1%               | 10.0               |
| 76**-501       | 500:5         | ±1%               | 10.0               |
| 76**-601       | 600:5         | ±1%               | 10.0               |
| 76**-751       | 750:5         | ±1%               | 10.0               |
| 76**-801       | 800:5         | ±1%               | 12.5               |
| 76**-102       | 1000:5        | ±1%               | 10.0               |
| 76**-122       | 1200:5        | ±1%               | 10.0               |
| 76**-152       | 1500:5        | ±1%               | 12.5               |
| 76**-162       | 1600:5        | ±1%               | 12.5               |
| 76**-202       | 2000:5        | ±1%               | 15.5               |


\*\* Note: When ordering, prefix Cat No. with model designation required i.e. 76RL-201, 76RBL-251, etc.




461 Boston Street, Unit E6, Topsfield, MA 01983  
Toll Free (800) 644-9773 · Phone (978) 887-2020  
meters@spectrumind.com

## Model 76


*Model 76SFT*

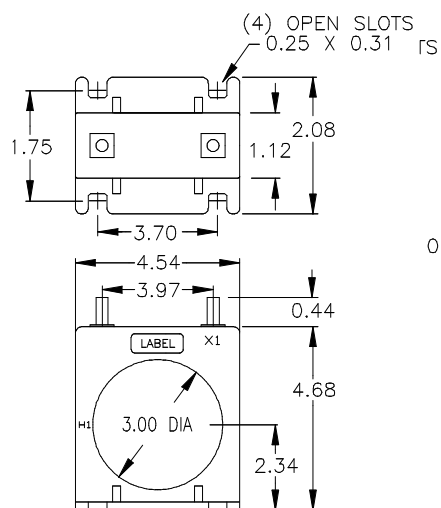


*Model 76RT*

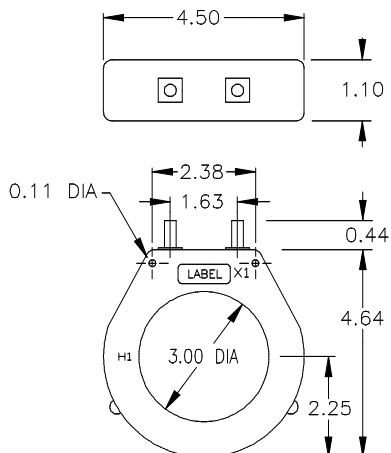

*Model 76RBT*

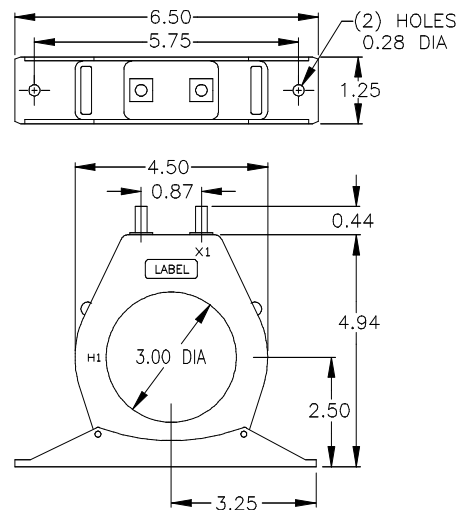

*Model 76RL*

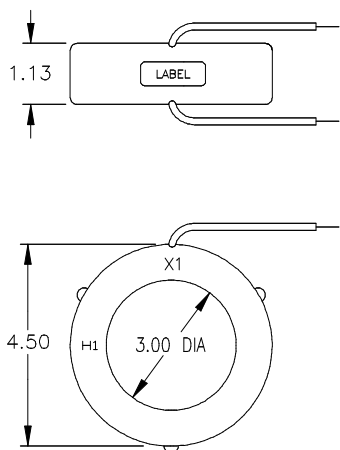

*Model 76RBL*

